D-Link®

KVM Switch

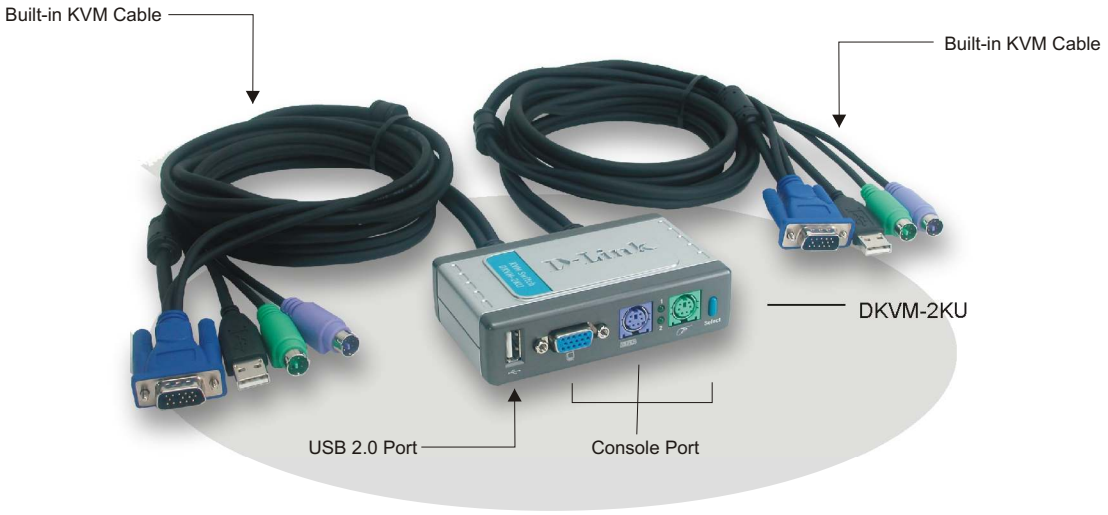

Mini KVM Switch Kit With USB Port for 2 PCs

Includes KVM Switch and 2 Sets of Built-in Cables & USB 2.0 Port

The DKVM-2KU 2-port mini KVM (Keyboard, Video and Mouse) switch kit is a cost effective kit for home and office users. This double function kit allows you to easily control 2 different PCs from a single set of keyboard, mouse, and VGA monitor, and to share a USB device with 2 PCs. It includes a 2-port KVM switch, a USB 2.0 port built into the switch, and 2 sets of built-in cables for ready connection to 2 PCs. The switch provides many easy-to-use features and is perfect for home and the small business.

Cost-effective for PC Users

If you have 2 PCs and need to use them at the same time, the DKVM-2KU saves you the money and space by allowing you to control your 2 computers from a set of keyboard, monitor and mouse. Or, you may have a better, bigger monitor and want to connect both PCs to it, the DKVM-2KU allows you to do this. 2 sets of cables are attached to the KVM switch ready for use, dispensing you of the need to prepare separate cables and connect them to the switch.

Versatile Functions

The DKVM-2KU utilizes advanced microprocessor emulation to intelligently manage each KVM port. This allows simultaneous boot-up of all attached PCs. Auto scan, audible feedback, and keyboard "Hot Keys" make the DKVM-2KU simple to use and manage. There is also a control button located on the front panel that allows you to switch between the PCs.

Status Save and High Resolution Support

The DKVM-2KU supports VGA, SVGA, and MultiSync monitors at up to 2048 x 1536 resolution at 72Hz refresh rate. Support for Microsoft IntelliMouse is provided.

USB 2.0 Port to Share USB Devices

A USB 2.0 port is built into this KVM switch to allow connection to a USB-supported device or a USB hub. This allows you to share your USB printer, scanner, card reader or other devices among the 2 connected PCs. This USB port is also backward compatible with USB 1.1 devices. By connecting this USB port to a USB hub, you can also share more than 1 USB device with your 2 PCs. In the Auto Scan mode, the USB device switching will come with the computer scan sequence.

Features

- *2 KVM ports to control of 2 computers from a single set of keyboard, monitor and mouse*
- *Built-in USB 2.0 port to share a USB device between the 2 PCs*
- *Saves desktop space, cost*
- *Auto scan mode sequences through PCs*
- *Audible feedback for confirmation while switching between PCs*
- *Front panel LED indicators for selected PC*
- *Switching between PCs using front panel SELECT button or Hot Key command*
- *Supports SVGA, VGA, and multi-sync monitors*
- *Video resolutions up to 2048 x 1536*
- *Successfully tested with following mice: Microsoft IntelliMouse, IntelliMouse with IntelliEye, and IntelliMouse Explorer, Logitech FirstMouse+, Ligitech MouseMan+*

DKVM-2KU

Technical Specifications

KVM Switch

Console Connectors (connect to keyboard, mouse, monitor)
- Keyboard connector: mini DIN-6 PIN female
- Mouse connector: mini DIN-6 PIN female
- Monitor connector: HD 15 PIN female

KVM & USB Cables With Connectors (connect to computers)
- 2 cables each 1.8 meter (6 feet) long attached to KVM switch
- 2 keyboard connectors: mini DIN-6 PIN male
- 2 mouse connectors: mini DIN-6 PIN male
- 2 monitor connectors: HD 15 PIN male
- 2 USB Type A connectors

USB Port Standard
USB 2.0

Diagnostic LEDs
2 port LEDs for 2 connected PCs

PC Selection (Manually switching back and forth between 2 PCs)
- Through Push buttons
- Through Hot Key
- Switching confirmation: buzzer sound

Physical & Environmental

Power Voltage
5V 1A

Power Input
From PC's PS2 port, no external power adapter required

Power Consumption
5V 70mA

Dimensions
104 x 62 x 28 mm (KVM switch only)

Weight
570 grams (KVM switch & 2 sets of KVM & USB cables)

Operating Temperature
0° to 40 °C

Storage Temperature
-20° to 60 °C

Operating Humidity
0% to 80%

Storage Humidity
0% to 80%

Emission (EMI)
- FCC Class B
- CE Class B
- C-Tick

Box Includes

- DKVM-2KU switch with 2 built-in sets of 1.8 m (6 ft) KVM cables
- Quick Installation Guide

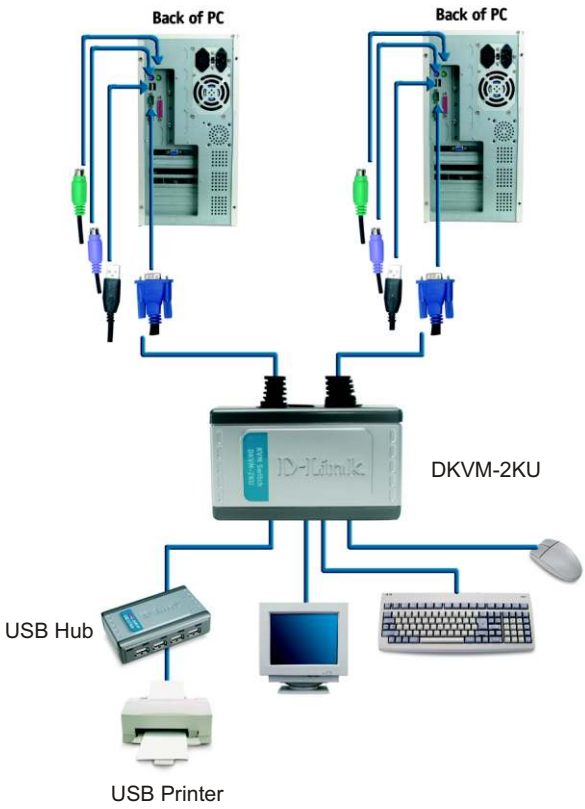

ACN 052 202 838

Ordering Information

DKVM-2KU	2-port mini KVM switch kit with built-in USB port
	Worldwide packaging (multi-lingual)

D-Link®

Specifications subject to change without prior notice.
D-Link is a registered trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

U.S.A	TEL: 1-949-788-0805	FAX: 1-949-753-7033
Canada	TEL: 1-905-8295033	FAX: 1-905-8295095
Europe	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300
France	TEL: 33-1-30238688	FAX: 33-1-30238689
Benelux	TEL: 31-10-282-1445	FAX: 31-10-282-1331
Italy	TEL: 39-2-2900-0676	FAX: 39-2-2900-1723
Iberia	TEL: 34-93-4090770	FAX: 34-93-4910795
Sweden	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901
Norway	TEL: 47-22-309075	FAX: 47-22-309085
Denmark	TEL: 45-43-969040	FAX: 45-43-424347
Finland	TEL: 358-9-2707-5080	FAX: 358-9-2707-5081
Singapore	TEL: 65-6774-6233	FAX: 65-6774-6322
Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
Japan	TEL: 81-3-5434-9678	FAX: 81-3-5434-9868
China	TEL: 86-10-8518-2533	FAX: 86-10-8518-2250
India	TEL: 91-22-652-6696	FAX: 91-22-652-8914
Middle East	TEL: 9714-8834234	FAX: 9714-8834394
Turkey	TEL: 90-212-335-2553	FAX:90-212-335-2500
Chile	TEL: 56-2-232-3185	FAX: 56-2-232-0923
Brasil	TEL: 55-11-3094-2910	FAX: 55-11-3094-2921
South Africa	TEL: 27(0)1266-52165	FAX: 27(0)1266-52186
Russia	TEL: 7-095-737-3389	FAX: 7-095-737-3390
Taiwan	TEL: 886-2-2910-2626	FAX: 886-2-2910-1515
D-Link Corp.	TEL: 886-2-2916-1600	FAX: 886-2-2914-6299

RECYCLABLE
Rev. 01 (Aug. 2003)